

- Electrically isolated
- Pull force – 3kg nom.
- -70°C to +200°C range
- 10/32UNF tapped hole
- 14.5mm Across flats
- 6.2mm height
- Low mass – 6.5gm



The KMMAG-14 is an isolated magnetic mounting base for use with accelerometers and other sensors requiring surface mounting. It features a nickel plated mild steel body and a PTFE isolating washer. This solution solves issues of earth loops causing interference in data signals from sensors.


Kemo can supply a range of adaptor studs for use with the KMMAG-14 making it flexible for use with a wide range of different manufacturer sensors

KMS-10M5 – M5 thread
KMS-1010S – 10/32UNF thread
KMS-1054 – 5-40UNC thread

Note:

When using magnetic mounts with dynamic devices such as accelerometers, careful consideration should be applied to the type of surface finish on the test item, it is critical a smooth surface is present to avoid chattering of the magnet which will cause noise and data errors.

10/32UNF tapped hole,
4.4mm deep

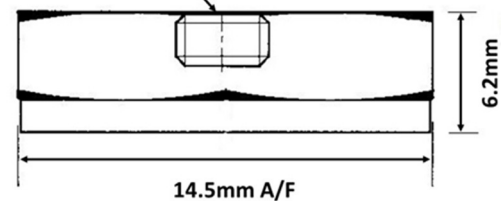

Materials List:

Body: Mild steel nickel plated

Insulator: PTFE

Magnet: Nickel plated Neodymium Iron Boron

Pull Force: 3kg nom.

Mounting Torque: 1.2Nm

Due to continued product development Kemo Limited reserve the right to change specification without notice.

Kemo Limited

Unit 1, Dene Yard
Green Street Green Road,
Dartford, Kent. DA2 8DH
www.kemo.com sales@kemo.com