


- Screened 4 core cable
- FEP Jacket
- -50°C to +200°C range
- Ideal for IEPE accelerometer sensors
- Black jacket colour
- Nominal diameter 2.2mm
- 1/4-28UNF 4 Pin Socket to 3 x 10/32UNF Plugs
- Labels X, Y, Z
- Length 5m±5%

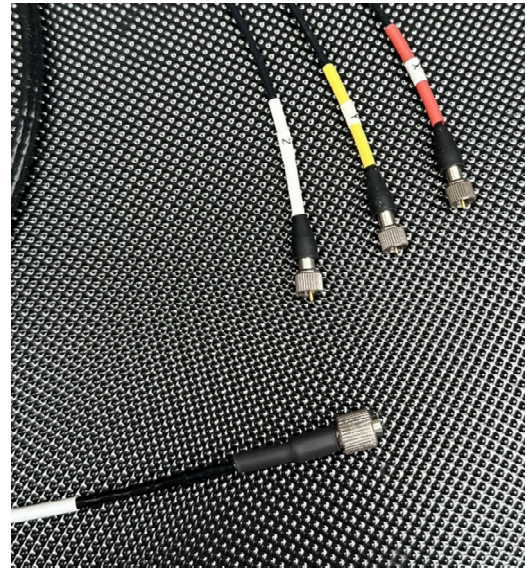

The 7F81-50 is a 5m cable assembly developed for use with a range of triaxial accelerometers that use a 1/4-28UNF threaded 4 pin connector. This connector is used on several of Kemo's own accelerometers as well as on a wide range of other competitor products.

The terminating connector is 3 x 10/32UNF microdot connectors labelled X, Y, Z

Featuring a lightweight 4 core cable of just 2.2mm diameter which ensures minimal mass loading and return vibration effect on the miniature triaxial accelerometer connected to the cable assembly.

Other cable lengths are available, please enquire for stock availability.

These cables are also available with alternative terminating connectors, including:

- BNC plugs
- SMA
- SMB
- BNC sockets



Due to continued product development Kemo Limited reserve the right to change specification without notice.

#### **Kemo Limited**

First Floor, 33 King Street, Thetford, Norfolk, IP24 2AW, United Kingdom  
+44 (0)1474 705168

[www.kemo.com](http://www.kemo.com) [sales@kemo.com](mailto:sales@kemo.com)