

- Gold plated pin
- Nickel plated brass body
- Nickel plated brass knurl nut
- 10/32UNF right angle plug
- Fitted by Kemo Ltd
- Rubber strain relief boot




The 10/32UNF Right angle Microdot plug connector is industry standard in applications such as accelerometers, pressure sensors and other similar test and measurement sensors. Its compact size and secure thread fitting are well suited to sensor applications.

This KMR-1 is fitted by Kemo to all of their cable assemblies requiring a 10/32UNF right angle microdot connector.

Suitable for cables with a nominal diameter of 2mm.

Dimensions in mm

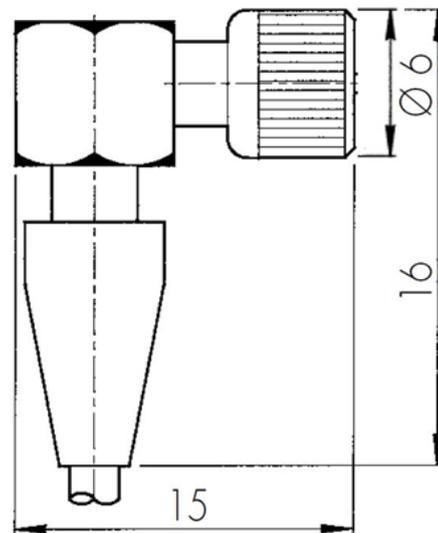

Variable	Value
<b>Physical</b>	
Body	Nickel Plated Brass
Knurl nut	Nickel Plated Brass
Centre Conductor	Gold plated brass
Insulator	PTFE
Strain relief boot	Rubber
Temperature Range	-70°C to +260°C

Due to continued product development Kemo Limited reserve the right to change specification without notice.

### Kemo Limited

First Floor, 33 King Street, Thetford, Norfolk, IP24 2AW, United Kingdom

+44 (0)1474 705168

[www.kemo.com](http://www.kemo.com) [sales@kemo.com](mailto:sales@kemo.com)