



- Miniature Triaxial IEPE Accelerometer
- Sensitivity – 100mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass – 5.8grams
- ¼-28UNF side entry 4 pin connector
- 5-40UNC tapped base for mounting

Specification	Metric	Imperial
Sensitivity	10.2mV/(m/s ²)	100mV/g
Measurement Range (pk)	±490m/s ²	±50g
Frequency Range ±10%	(Y, Z) 1 to 8000 Hz (X) 2 to 7000Hz	
Resonant Frequency	≥45 kHz	
Non-Linearity	≤1 %	
Transverse Sensitivity	≤5 %	
Electrical Noise Floor	0.001m/s ² rms	0.0001g rms
Overload Limit (Shock)	±49000(m/s ²)pk	±5000gpk
Operating Temp. Range	-55 to +125°C	-67 to +257°F
Compliance Voltage (Supply)	+18 to +28 VDC	
Current range	2 – 10mA	
Output Bias Voltage	11VDC ± 1.5VDC	
Size (excluding connector)	11.5x11.5x11.5 (mm)	0.45x0.45x0.45 (in)
Weight	5.8gm	0.204oz
Sensing Geometry	Shear	
Sensing Element Material	PZT-5	
Case Material	Titanium	
Connector Position	Side	
Case sealing	Hermetic	
Electrical Connection Type	¼-28UNF 4 pin	
Mounting	5-40UNC tapped base on two sides	

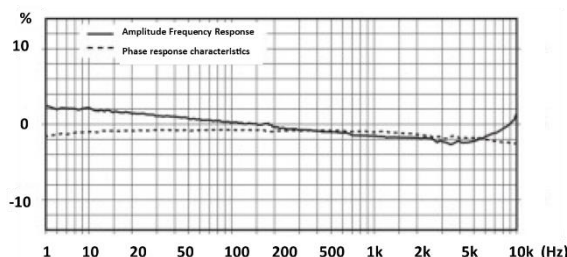

The SVT100S-T is a miniature triaxial IEPE accelerometer for use where mass loading is potentially an issue and should be minimised. At just 11.5mm cube and 5.8 grams it has an excellent frequency response. Tapped on two sides for ease of mounting.

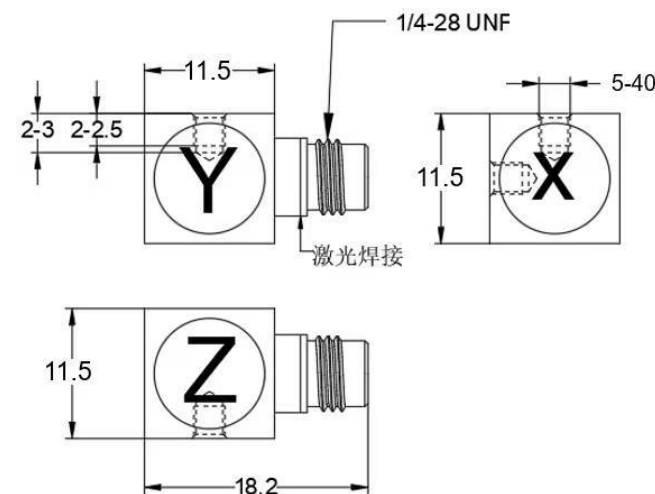

Kemo has a range of cable assemblies available for use with the SVT100S-T

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited

First Floor, 33 King Street, Thetford, Norfolk, IP24 2AW, United Kingdom
+44 (0)1474 705168

www.kemo.com sales@kemo.com

Iss.1 – July 2023