



- Ultra Miniature Triaxial IEPE Accelerometer
- Sensitivity – 5mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass - 1grams
- Integral cable with ¼-28UNF connector
- Flat base for adhesive mounting

Specification	Metric	Imperial
Sensitivity	0.51mV/(m/s²)	5mV/g
Measurement Range (pk)	±9800m/s²	±1000g
Frequency Range ±10%	(Y & Z axes) 1 to 10000 Hz X axis 1 to 8000Hz	
Resonant Frequency	≥250 kHz	
Non-Linearity	≤1 %	
Transverse Sensitivity	≤5 %	
Electrical Noise Floor	0.02m/s² rms	0.002g rms
Overload Limit (Shock)	±49000(m/s²)pk	±5000gpk
Operating Temp. Range	-55 to +125°C	-67 to +257°F
Compliance Voltage (Supply)	+18 to +28 VDC	
Current range	2 – 10mA	
Output Bias Voltage	11VDC ± 1.5VDC	
Size (excluding connector)	6.35x6.35x6.35 (mm)	0.25x0.25x0.25 (in)
Weight	1gm	0.035oz
Sensing Geometry	Shear	
Sensing Element Material	PZT-5	
Case Material	Titanium	
Connector Position	Side	
Case sealing	Hermetic	
Electrical Connection Type	¼-28UNF 4 pin on end of Integral cable	
Mounting	Flat base for adhesive mounting	



The SVT5I-A is an ultra miniature IEPE triaxial accelerometer weighing just 1gram and providing almost invisible mass effects on the unit under test.

Just 6.35mm cube and featuring a flexible integral cable for minimal vibration response effects the SVT5I-A is a superb triaxial IEPE accelerometer.

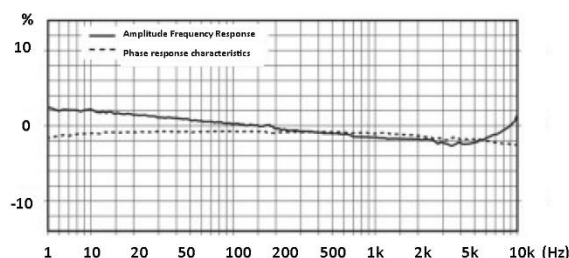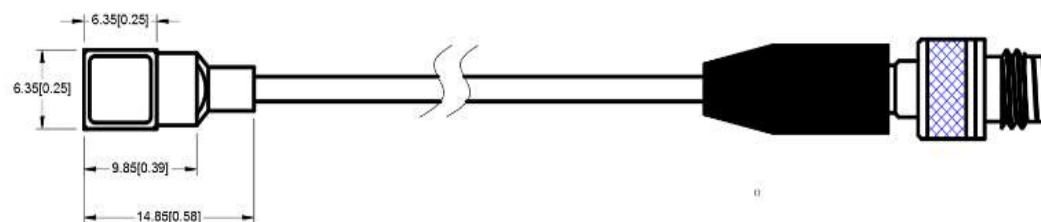

Kemo has a range of cable assemblies available for use with the SVT5I-A

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

Kemo Limited

First Floor, 33 King Street, Thetford, Norfolk, IP24 2AW, United Kingdom
+44 (0)1474 705168

www.kemo.com sales@kemo.com

Iss.1 – February 2022