



- Triaxial IEPE Accelerometer
- Sensitivity – 10mV/g
- Shear design
- Piezoelectric ceramic PZT-5
- Mass - 11grams
- ¼-28UNF side entry 4 pin connector
- Tapped base for stud mounting

Specification	Metric	Imperial
Sensitivity	1.02mV/(m/s²)	10mV/g
Measurement Range (pk)	±4900m/s²	±500g
Frequency Range ±10%	(Y,Z) 1 to 8000 Hz (X) 1 to 7000	
Resonant Frequency	≥30 kHz	
Non-Linearity	≤1 %	
Transverse Sensitivity	≤5 %	
Electrical Noise Floor	0.01m/s² rms	0.001g rms
Overload Limit (Shock)	±29400(m/s²)pk	±3000gpk
Operating Temp. Range	-55 to +125°C	-67 to +257°F
Compliance Voltage (Supply)	+18 to +28 VDC	
Current range	2 – 20mA	
Output Bias Voltage	10VDC ± 2VDC	
Size (excluding connector)	14x14x14 (mm)	0.55x0.55x0.55 (in)
Weight	11gm	0.39oz
Sensing Geometry	Shear	
Sensing Element Material	PZT-5	
Case Material	Titanium	
Connector Position	Side	
Case sealing	Hermetic	
Electrical Connection Type	¼-28UNF 4 pin	
Mounting	10/32UNF Tapped Base	

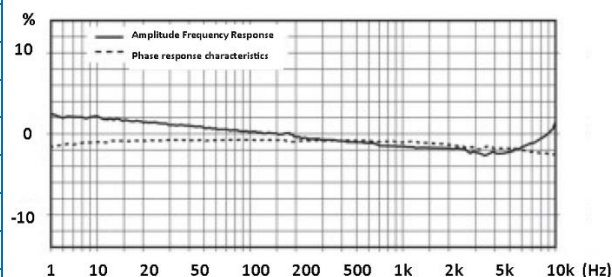

The GVT10S-TC is a general purpose cube shaped triaxial IEPE accelerometer for the measurement of broadband vibration in a wide range of vibration test applications, its small size and low mass make it an ideal all rounder. With a tapped base on two sides it provides flexible mounting options.

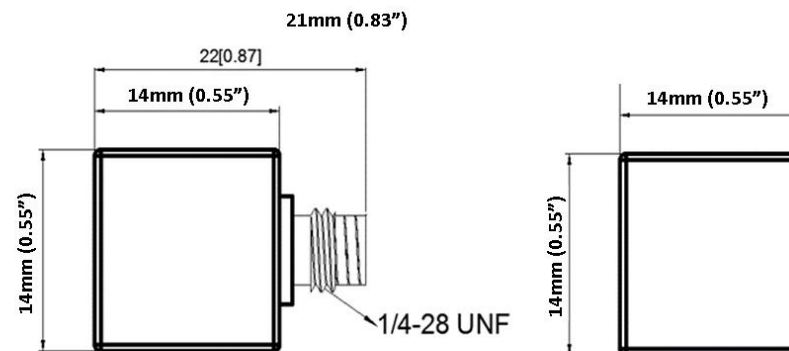

Kemo has a range of cable assemblies available for use with the GVT10S-TC

- 7F82-50 – 5m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F82-30 - 3m cable ending in 3 x BNC plugs (X, Y, Z)
- 7F81-50 - 5m cable ending in 3 x microdot plugs (X, Y, Z)
- 7F81-30 - 3m cable ending in 3 x microdot plugs (X, Y, Z)

### Kemo Limited

First Floor, 33 King Street, Thetford, Norfolk, IP24 2AW, United Kingdom  
+44 (0)1474 705168

[www.kemo.com](http://www.kemo.com) [sales@Kemo.com](mailto:sales@Kemo.com)

Iss.1 – January 2024